


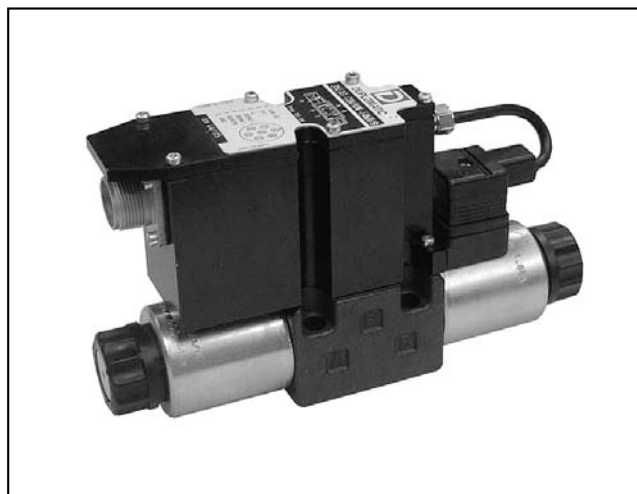

DSE3G


DIRECTIONAL VALVE WITH PROPORTIONAL CONTROL AND INTEGRATED ELECTRONICS SERIES 11

**SUBPLATE MOUNTING
ISO 4401-03 (CETOP 03)**

p max 350 bar

Q max 40 l/min


MOUNTING SURFACE

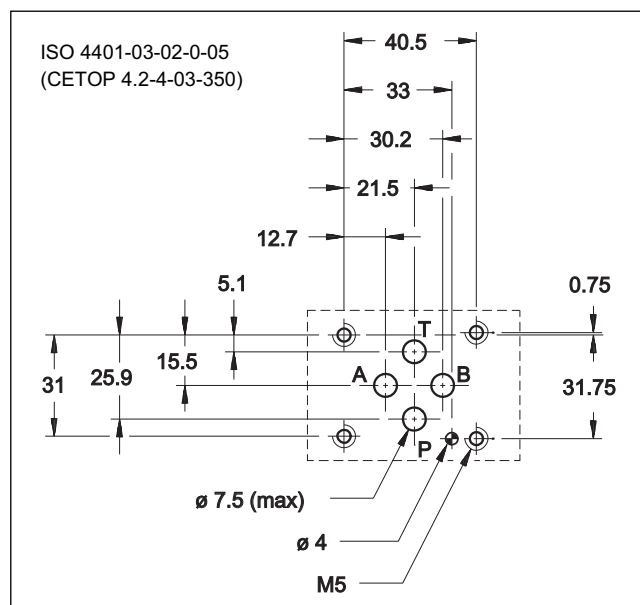

PERFORMANCES (obtained with mineral oil with viscosity of 36 cSt at 50°C and with digital integrated electronics)

Max operating pressure:	bar	350
- P - A - B ports		210
- T port		
Nominal flow with Δp 10 bar P-T	l/min	4 - 8 - 16 - 26
Response times	see paragraph 4	
Hysteresis	% of Q_{max}	< 3%
Repeatability	% of Q_{max}	< $\pm 1\%$
Electrical characteristics	see paragraph 5	
Ambient temperature range	°C	-10 / +50
Fluid temperature range	°C	-20 / +80
Fluid viscosity range	cSt	10 ÷ 400
Fluid contamination degree	according to ISO 4406:1999 class 18/16/13	
Recommended viscosity	cSt	25
Mass:	kg	
single solenoid valve		1,9
double solenoid valve		2,4

OPERATING PRINCIPLE

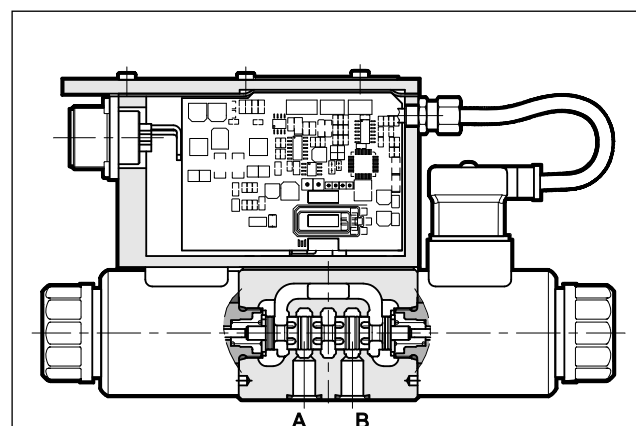


— The DSE3G is a direct operated directional valve with integrated electric proportional control and mounting interface in compliance with ISO 4401 (CETOP RP 121H) standards.

— It is normally used to control the positioning and the speed of hydraulic actuators.

— The valve opening and hence flow rate can be modulated continuously in proportion to the reference signal.

— The valve is controlled directly by an integrated digital amplifier (see par. 5).

HYDRAULIC SYMBOLS (typical)

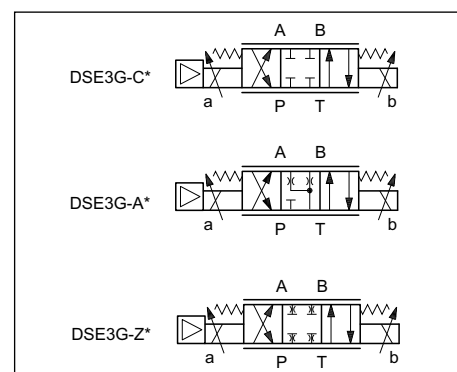

1 - IDENTIFICATION CODE

D	S	E	3	G	-				/	11	-		K11	/		/	
---	---	---	---	---	---	--	--	--	---	----	---	--	-----	---	--	---	--

Direct operated directional control valve

Electric proportional control

Size ISO 4401-03 (CETOP 03)

Digital integrated electronics for open loop

Spool type:
C = closed centres
A = open centres
Z = zero overlap

Nominal flow rate of the spool (see chart par. 2)

Manual override (see paragraph 10)

B = standard version
C = with connection for CAN communication

Main connector 6 pin + PE

Reference signal:
E0 = voltage $\pm 10V$
E1 = current 4 / 20mA

Seals:
N = NBR seals for mineral oil (**standard**)
V = FPM seals for special fluids


Series No. (the overall and mounting dimensions remain unchanged from 10 to 19)

Solenoid position (omit for 2 solenoids configuration):
SA = 1 solenoid on side A


2 - CONFIGURATIONS

Valve configuration depends on the combination of the following elements:
 number of proportional solenoids, spool type, rated flow.

Configuration 2 solenoids :
 3 positions with spring centering

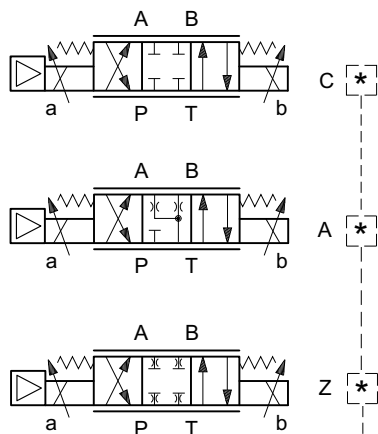

Configuration 1 solenoid on side A "SA":
 2 positions (central + external) with spring centering

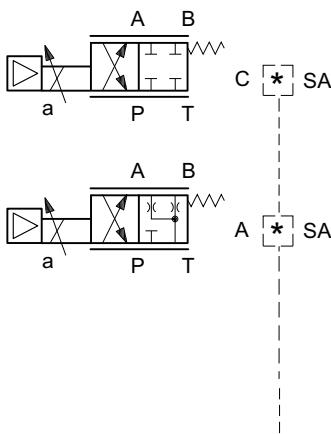


*	Controlled flow with $\Delta p 10$ bar P-T
04	4 l/min
08	8 l/min
16	16 l/min
16/08	16 (P-A) / 08 (B-T) l/min
26	26 l/min
26/13	26 (P-A) / 13 (B-T) l/min

3 - CHARACTERISTIC CURVES (obtained with mineral oil with viscosity of 36 cSt at 50°C and with digital integrated electronics)



Typical flow rate curves at constant Δp related to the reference signal and measured for the available spools. The Δp values are measured between P and T valve ports.

The curves are obtained after linearization in factory of the characteristic curve through the digital amplifier. The linearization of the curve is performed with a constant Δp of 30 bar and by setting the value of flow start at 10% of the reference signal.



NOTE: for the zero overlap spool (Z), please refer to the characteristic curves of C type spool, considering that the starting flow rate value is approx. 150 mV.





SPOOL TYPE C04

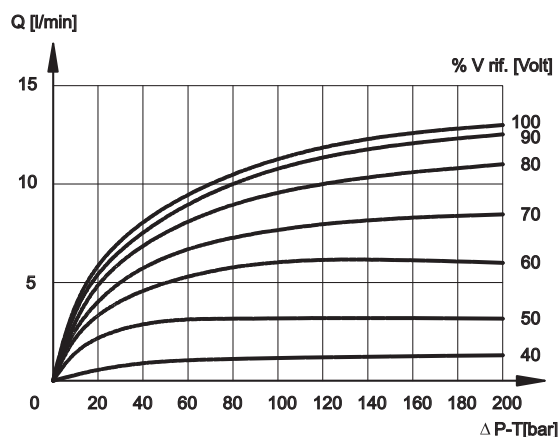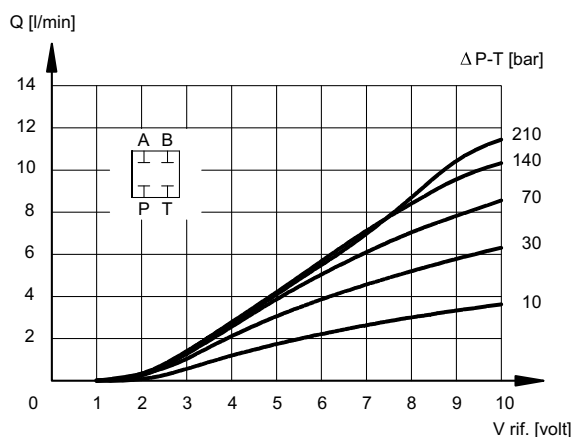

SPOOL TYPE C08

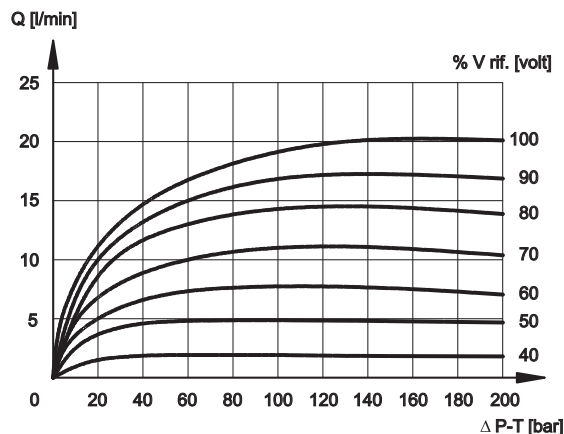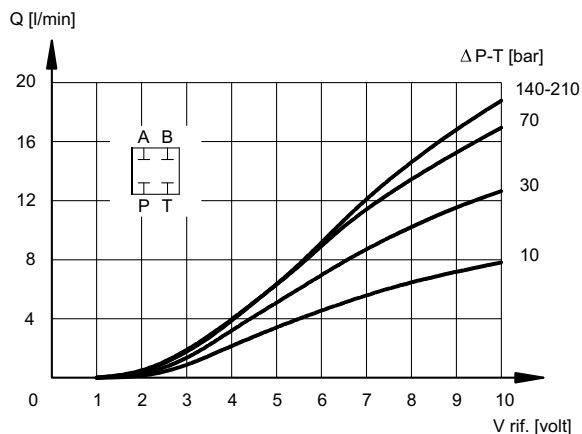

SPOOL TYPE C16

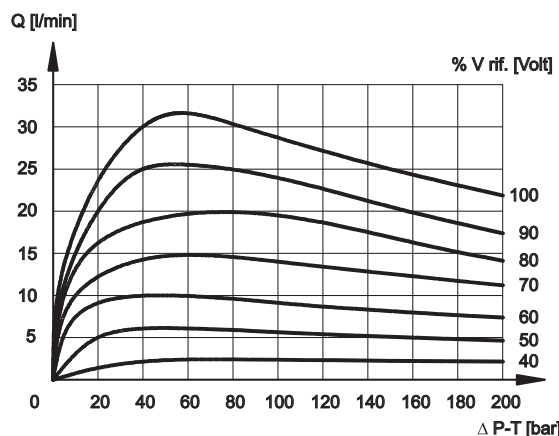
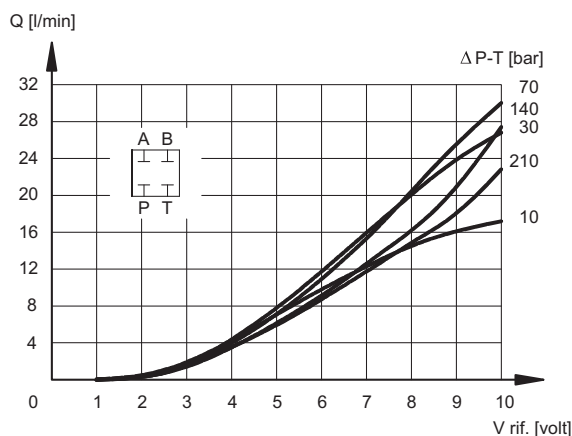






DSE3G

SERIES 11



SPOOL TYPE C26

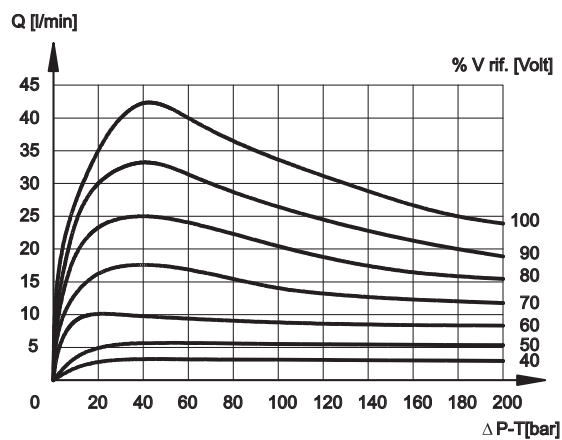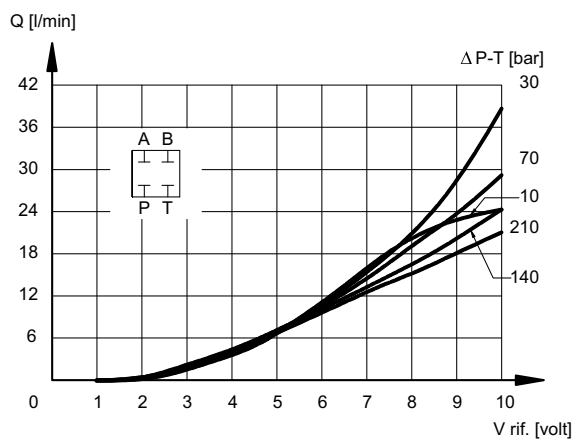

SPOOL TYPE A04

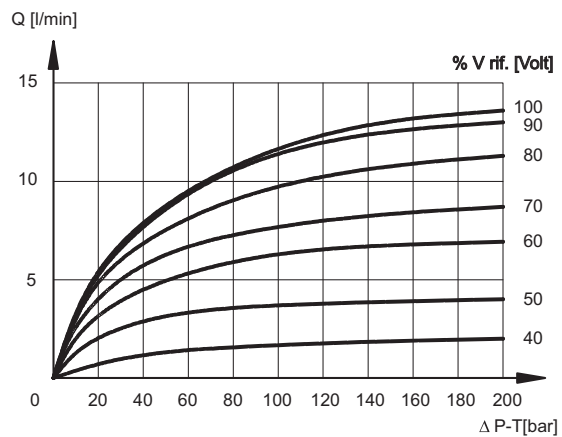
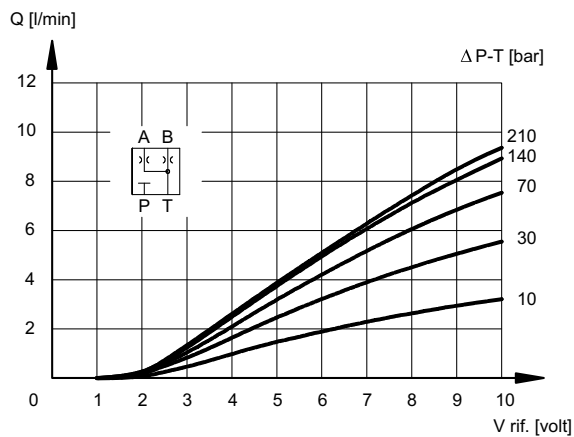


SPOOL TYPE A08

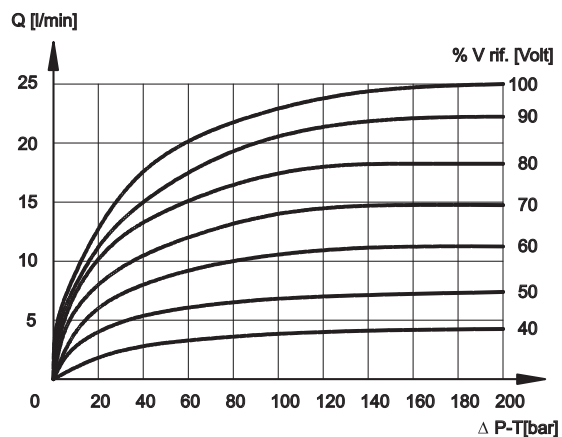
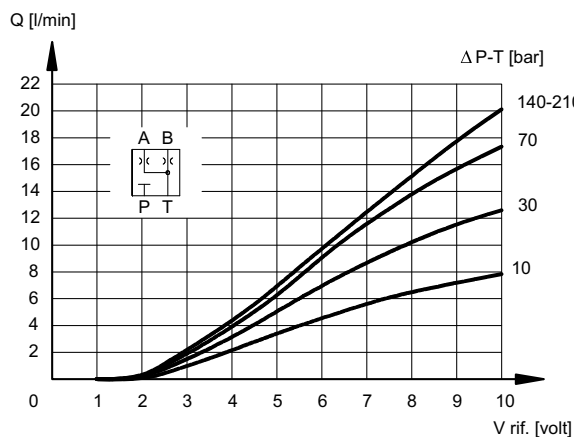





SPOOL TYPE A16

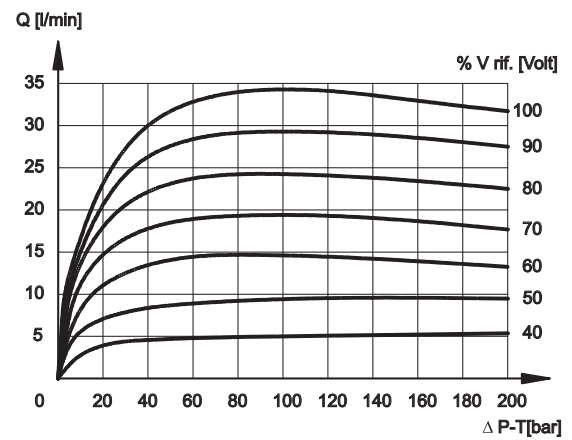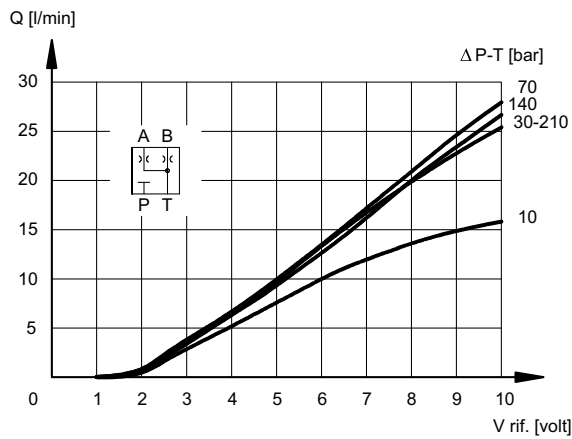

SPOOL TYPE A26

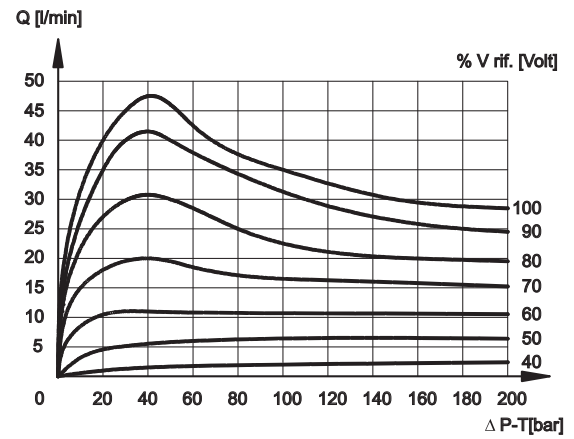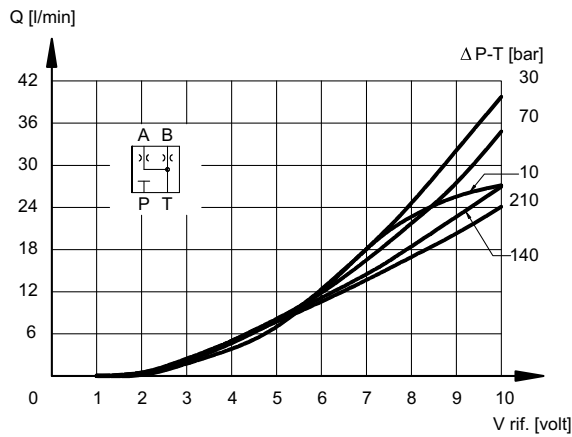

4 - RESPONSE TIMES (obtained with mineral oil with viscosity of 36 cSt at 50°C and with digital integrated electronics)

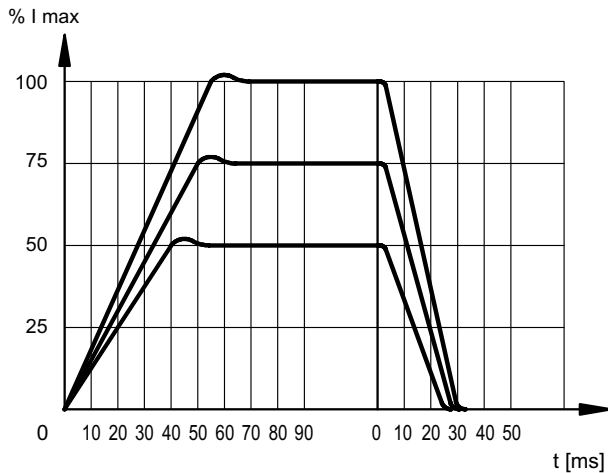

With reference time $\pm 100\%$, the rising time is 50 ms, the fall time 25 ms

5 - ELECTRICAL CHARACTERISTICS

5.1 - Digital integrated electronics

The proportional valve is controlled by a digital amplifier (driver), which incorporates a microprocessor that controls, via software, all the valve functions, such as:


- continuous converting (0,5ms) of the voltage reference signal (E0) or of the current reference signal (E1) in a digital value
- generation of up and down ramps (see note)
- gains limit (see note)
- compensation of the dead band
- linearization of the characteristic curve
- regulation of the current to the solenoid
- dynamic regulation of PWM frequency
- protection of the solenoid outputs against possible short circuits

NOTE: these parameters can be set through the connection to the CAN connector, by means of a personal computer and relevant software (see par. 6.3)

The digital driver enables the valve to reach better performance compared to the analogic version, such as:

- reduced hysteresis and better repeatability
- reduced response times
- linearization of the characteristic curve which is optimised in factory for each valve
- complete interchangeability in case of valve replacement
- possibility to set, via software, the functional parameters
- possibility to interface a CAN-Open network
- possibility to perform a diagnostic program by means of the CAN connection
- high immunity to electromagnetic troubles

5.2 - Functional block diagram

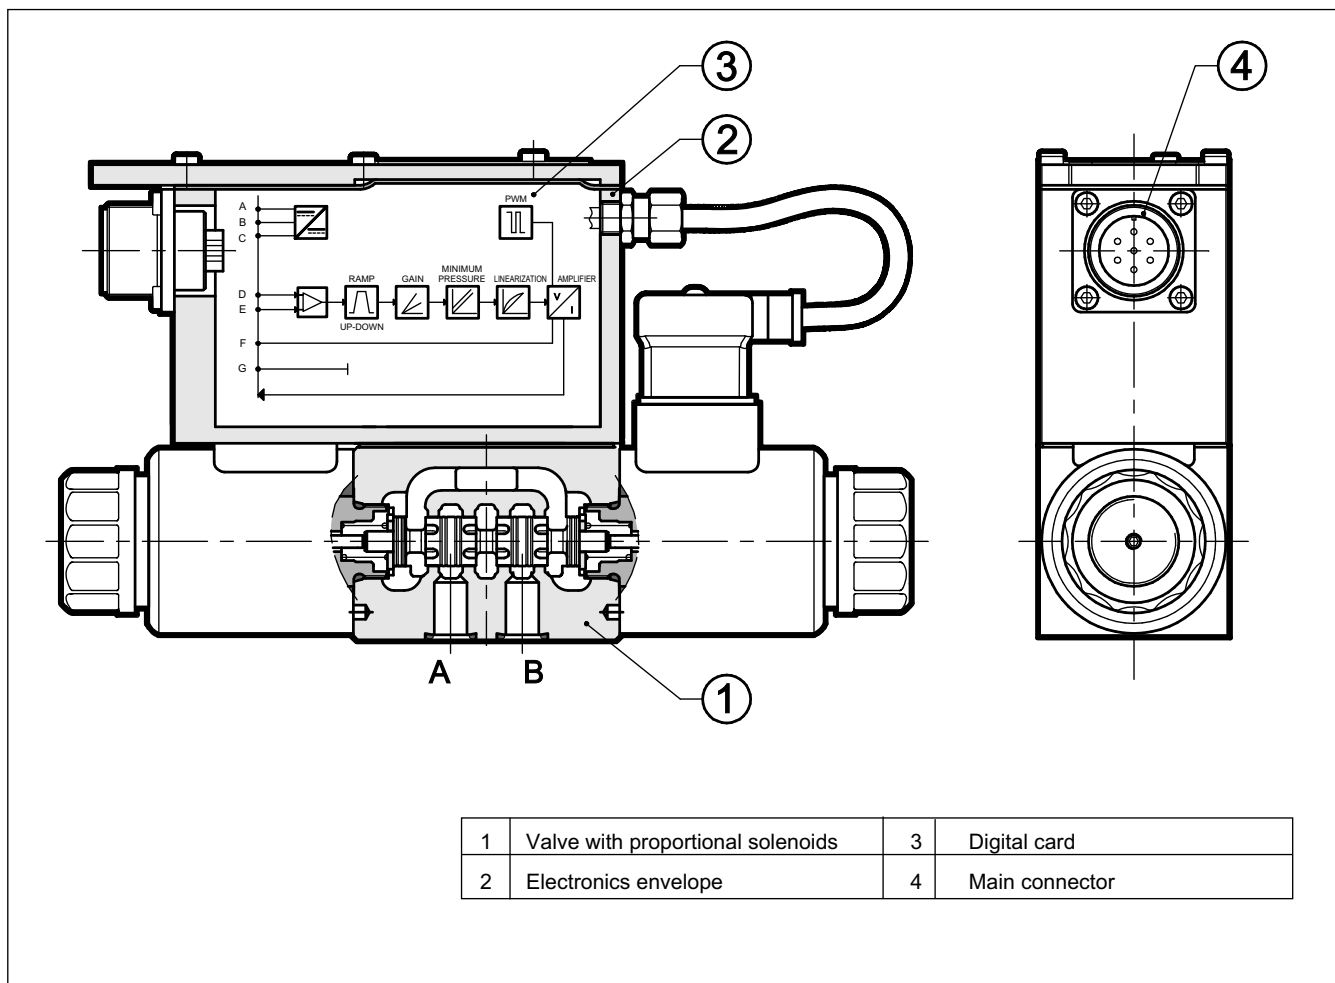

5.3 - Electrical characteristics

NOMINAL VOLTAGE	V DC	24 (from 19 to 35 VDC, ripple max 3 Vpp)
ABSORBED POWER	W	50
MAXIMUM CURRENT	A	1,88
DUTY CYCLE		100%
VOLTAGE SIGNAL (E0)	V DC	±10 (Impedence Ri > 50KΩ)
CURRENT SIGNAL (E1)	mA	4 ÷ 20 (Impedence Ri = 500 Ω)
ALARMS		Overload and electronics overheating
COMMUNICATION		Interface of the optoisolated industrial Field-bus type CAN-Bus ISO 11898
MAIN CONNECTOR		7 - pin MIL-C-5015-G (DIN 43563)
CAN-BUS CONNECTOR		M12-IEC 60947-5-2
ELECTROMAGNETIC COMPATIBILITY (EMC)		
emissions	CEI EN 61000-6-4	According to 2004/108/CE standards
immunity	CEI EN 61000-4-2	
PROTECTION AGAINST ATMOSPHERIC AGENTS :		IP67 (CEI EN 60529 standards)


6 - OPERATING MODALITIES

The digital driver of DSE3G valve may be used with different functions and operating modalities, depending on the requested performances.

6.1 -Standard version with voltage reference signal (E0)

This is the most common version; it makes the valve completely interchangeable with the traditional proportional valves with analogic type integrated electronics. The valve has only to be connected as indicated below. This version doesn't allow the setting of the valve parameters, for example the ramps must be performed in the PLC program, as well as the reference signal limit.

Connection scheme (B version - E0)

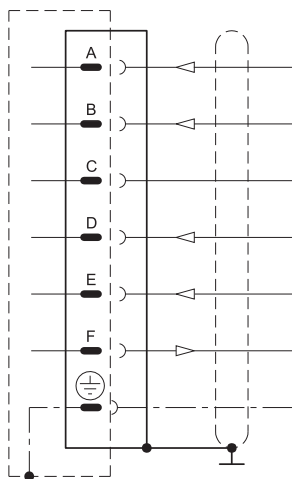


Pin	Values	Function	NOTES
A	24 VDC	Voltage	from 19 to 35 VDC (ripple max 3 Vpp) (see NOTE 3)
B	0 V	Power supply (zero)	0 V
C	----	Not used	----
D	± 10 V	Input rated command	Impedence $R_i > 50$ k Ω (see NOTE 1)
E	0 V	Input rated command	----
F	± 10 V	Coil current	$\pm 100\% I_{MAX}$ (see NOTE 2)
PE	GND	Protective ground	----

6.2 - Standard version with current reference signal (E1)

This version has characteristics which are similar to the previous one, with the difference that in this case the reference signal is supplied in current 4 - 20 mA. With the 12 mA signal the valve is in central position, with the 20 mA signal the valve performs the configuration P-A and B-T, while with 4 mA the configuration is P-B and A-T. For "SA" single solenoid valves, with reference 20 mA to pin D, the valve full opening is P-B and A-T, while with 4 mA the valve is at rest. This configuration may be modified via software. If the current to solenoid is lower, than the card shows a BREAKDOWN CABLE error. To reset the error switch-off the supply.

Connection scheme (B version - E1)

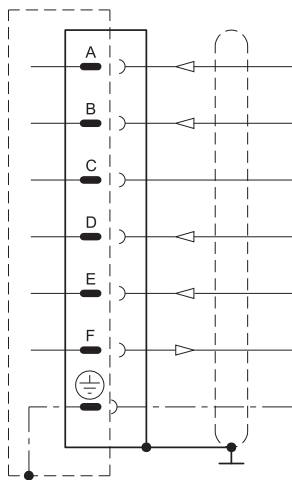

Pin	Values	Function	NOTES
A	24 VDC	Voltage	from 19 to 35 VDC (ripple max 3 Vpp) (see NOTE 3)
B	0 V	Power supply (zero)	0 V
C	----	Not used	----
D	4 ÷ 20 mA	Input signal	Impedence $R_i = 500$ Ω
E	0 V	Zero reference	----
F	± 10 V	Coil current	$\pm 100\% I_{MAX}$ (see NOTE 2)
PE	GND	Protective ground	----

NOTE 1: The input signal is differential type on E0 version only. For double solenoid valves, with positive reference signal connected to pin D, the valve opening is P - A and B - T. With zero reference signal the valve is in central position. For "SA" single solenoid valves, with positive reference to pin D, the valve opening is P-B and A-T. The spool stroke is proportional to $U_D - U_E$.

If only one input signal (single-end) is available, the pin B (0V power supply) and the pin E (0V reference signal) must be connected through a jumper and both connected to GND, electric panel side.

NOTE for the wiring: connections must be made via the 7-pin plug mounted on the amplifier. Recommended cable sizes are 0,75 mm² for cables up to 20m and 1,00 mm² for cables up to 40m, for power supply. The signal cables must be 0,50 mm². A suitable cable would have 7 cores, a separate screen for the signal wires and an overall screen.

NOTE 2: read the test point pin F in relation to pin B (0V)

6.3 - Version with parameters set by means of CAN connector (version C)

This version enables the setting of some parameters of the valve, by connecting the CAN connector to a traditional computer. To do this, it is necessary to order the interface device for USB port **CANPC-USB/20**, cod. 3898101002, with the relevant configuration software, the communication cable (L=3 meters) and an hardware converter for connecting the valve to the PC USB port. The software is Microsoft Windows Xp[®] compliant.

The parameters that can be set are described below:

Maximum current (Gain regulation)

I_{max} A and I_{max} B set the maximum current to the solenoid A corresponding to the positive value of the input reference. This parameter allows the reduction of the valve flow rate with the maximum reference.

Default value = 100% of full scale

Range: from 100% to 50% of full scale

PWM Frequency

Sets the PWM frequency, which is the pulsating frequency of the control current. The PWM decrease improves the valve accuracy, decreasing the regulation stability. The PWM increase improves the regulation stability, causing a higher hysteresis.

Default value = 300 Hz

Range 50 ÷ 500 Hz

Ramps

Increase time of Ramp R1 - solenoid A: sets the current increase time for a variation from 0 to 100% of the input reference from zero to -10V.

Decrease time of Ramp R2 - solenoid A: sets the current decrease time for a variation from 100 to 0% of the input reference from -10V to zero.

Increase time of Ramp R3 - solenoid B: sets the current increase time for a variation from 0 to 100% of the input reference from zero to -10V.

Decrease time of Ramp R4 - solenoid B: sets the current decrease time for a variation from 100 to 0% of the input reference from -10V to zero.

Min time = 0,001 sec



Max time = 40,000 sec

Default time = 0,001 sec.

Diagnostics

Provides several information parameters, such as:

- The electronic driver status (Working or Broken)
- The active regulation
- Input reference
- Current value

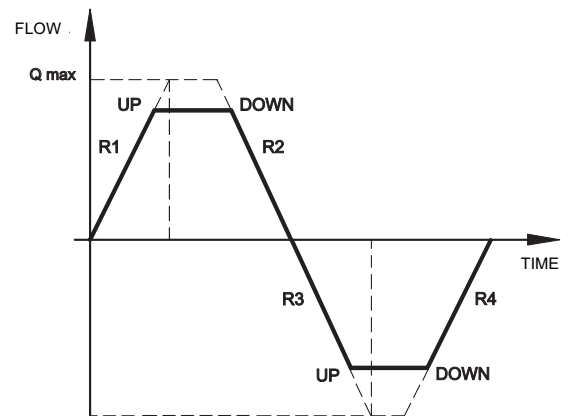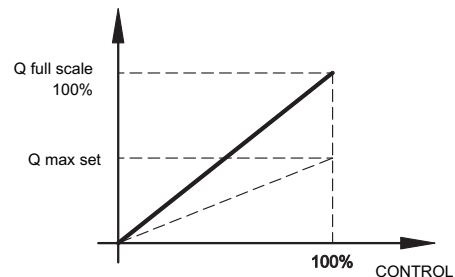

6.4 - Version with CAN-Bus interface (version C)

This version allows the valve piloting through the industrial field bus CAN-Open, according to ISO 11898 standards.

The CAN connector must be connected (see scheme) as a slave node of the CAN-Open bus, while the main connector is wired only for the power supply (pin A and B + earth)

The most important characteristics of a CAN - Open connection are:

- Parameter storage also in PLC
- Parameters setting in real-time (PDO communication)
- On-line valve diagnostics
- Easy wiring with the serial connection
- Communication program according to international standards

For detailed information on the CAN-Open communication software, see cat. 89 800.

CAN connector connection scheme

Pin	Values	Function
1	CAN_SHLD	Monitor
2	CAN +24VDC	BUS + 24 VDC (max 30 mA)
3	CAN 0 DC	BUS 0 VDC
4	CAN_H	BUS line (high signal)
5	CAN_L	BUS line (low signal)


NOTE: If the valve is the closing node of the CAN web, insert a 120 Ω resistance on the connector pins n° 4 and 5.

7 - INSTALLATION

DSE3G valves can be installed in any position without impairing correct operation.

Ensure that there is no air in the hydraulic circuit.

Valves are fixed by means of screws or tie rods on a flat surface with planarity and roughness equal to or better than those indicated in the relative symbols. If minimum values are not observed, fluid can easily leak between the valve and support surface.

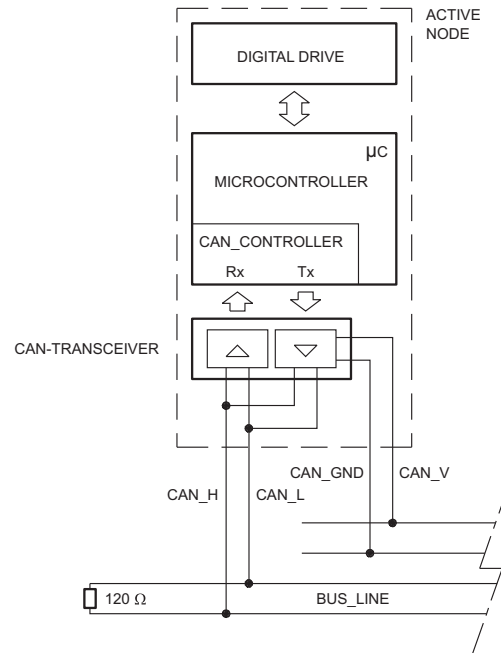


8 - HYDRAULIC FLUIDS



Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals. For fluids HFDR type (phosphate esters) use FPM seals (code V). For the use of other kinds of fluid such as HFA, HFB, HFC, please consult our technical department.

Using fluids at temperatures higher than 80 °C causes a faster degradation of the fluid and of the seals characteristics.

The fluid must be preserved in its physical and chemical characteristics.

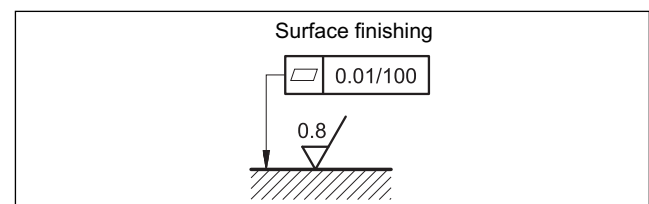

9 - OVERALL AND MOUNTING DIMENSIONS

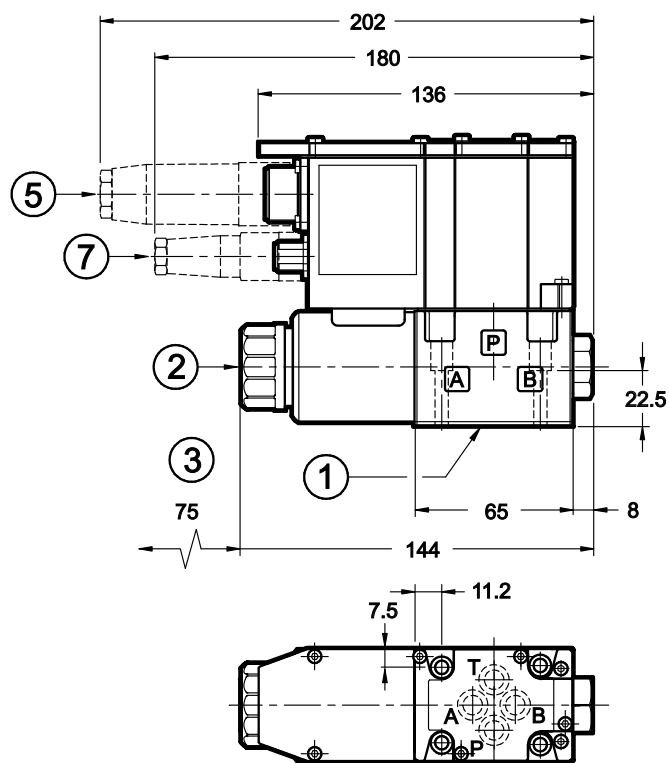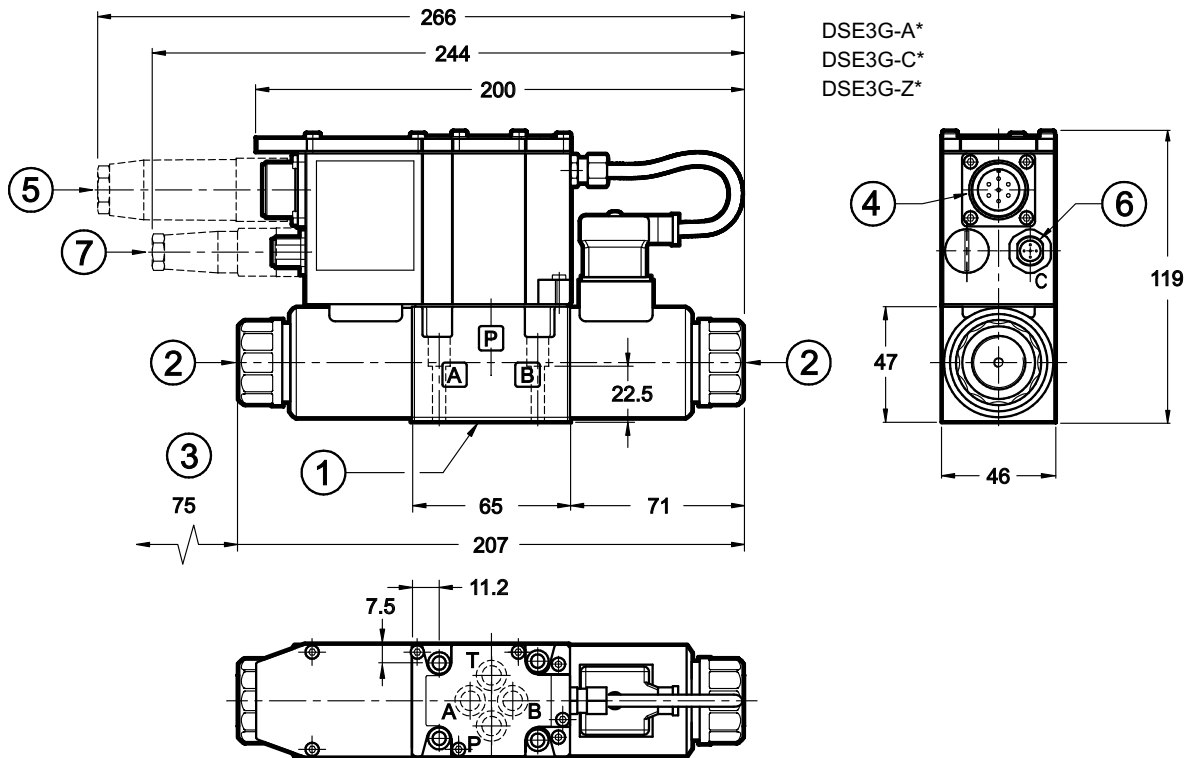

dimensions in mm

Fastening bolts: 4 bolts M5x30

Torque: 5 Nm

1	Mounting surface with sealing rings: 4 OR type 2037 - 90 shore (9.25 x 1.78)
2	Standard manual override embedded in the pipe of the solenoid (included in the supply)
3	Coil removal space
4	Main connection
5	Electrical connector 7 pin DIN 43563 - IP67 PG11 EX7S/L/10 code 3890000003 (to be ordered separately)
6	CAN-Bus connection (only for version C)
7	Electrical connector 5 pin M12 - IP67 PG7 EC5S/M12L/10 code 3491001001 only for version C (to be ordered separately)




10 - MANUAL OVERRIDE

The standard valve has solenoids whose pin for the manual operation is integrated in the tube. The operation of this control must be executed with a suitable tool, minding not to damage the sliding surface.

Two different manual override version are available upon request:

- **CM** version, manual override belt protected.
- **CS** version, with metal ring nut provided with a M4 screw and a blocking locknut to allow the continuous mechanical operations.

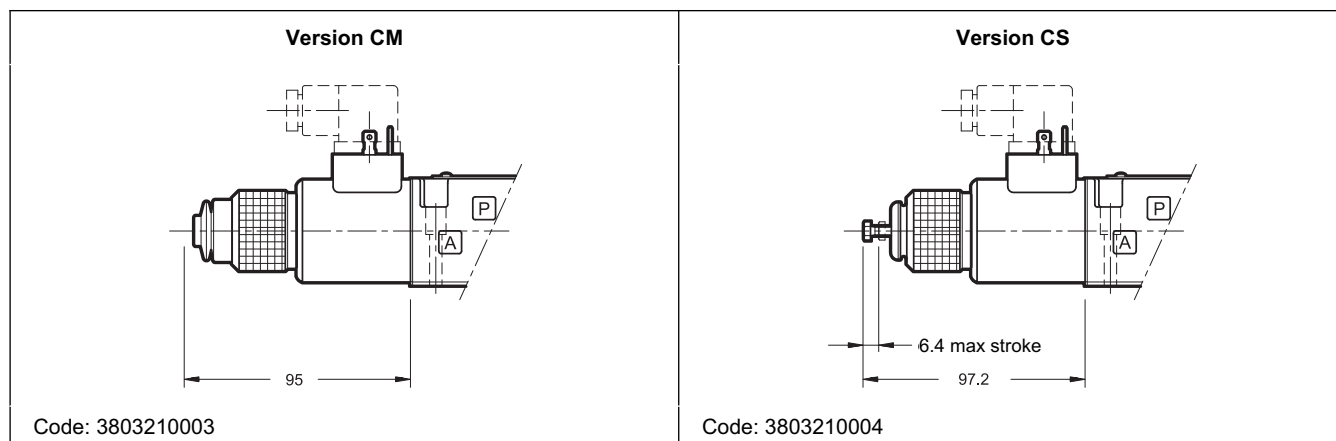

11 - SUBPLATES (See catalogue 51 000)

PMMD-AI3G rear ports
PMMD-AL3G side ports
Ports dimensions: P, T, A, B: 3/8" BSP



DUPLOMATIC OLEODINAMICA S.p.A.

20015 PARABIAGO (MI) • Via M. Re Depaolini 24

Tel. +39 0331.895.111

Fax +39 0331.895.339

www.duplomatic.com • e-mail: sales.exp@duplomatic.com