


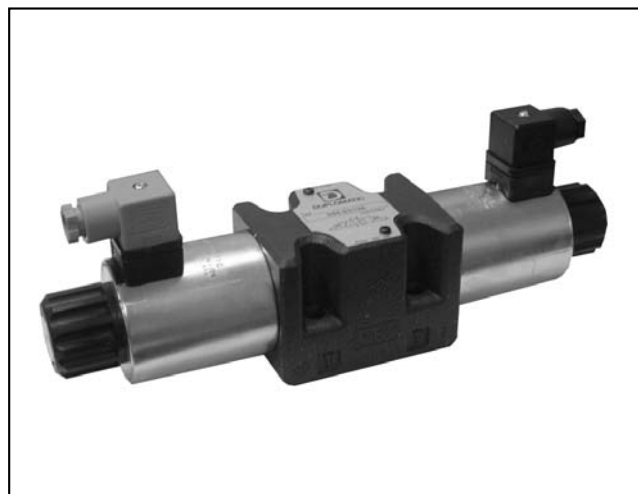

DSE5

DIRECTIONAL VALVE WITH PROPORTIONAL CONTROL

SERIES 10


SUBPLATE MOUNTING ISO 4401-05 (CETOP 05)

p max 320 bar


Q max 90 l/min

MOUNTING INTERFACE

ISO 4401-05-04-0-05
(CETOP 4.2-4-05-320)

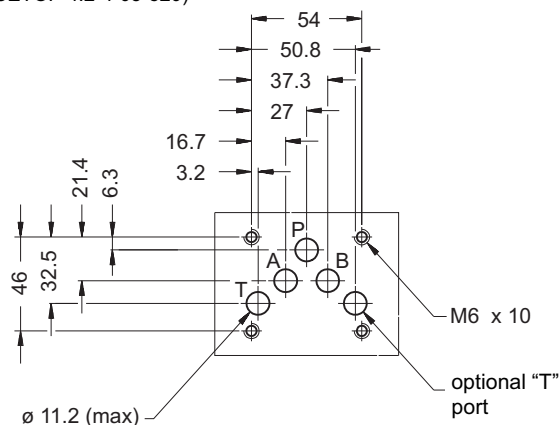

OPERATING PRINCIPLE

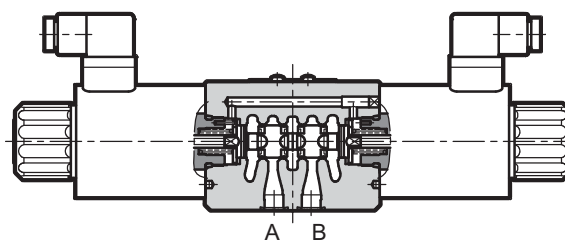



- The DSE5 valve is a directly operated directional control valve with electric proportional control and with ports in compliance with ISO 4401 standards (CETOP RP 121H).
- It is used for directional and speed control of the hydraulic actuators.
- Valve opening and hence flow rate can be modulated continuously in proportion to the current supplied to the solenoid.
- The valve can be controlled directly by a current control supply unit or by means of the relative electronic control units to exploit valve performance to the full (see paragraph 10).
- The DS5 valve is available in special version with Y external subplate drain port (see paragraph 9).

PERFORMANCES

(obtained with mineral oil with viscosity of 36 cSt at 50°C and electronic control cards)

Maximum operating pressure: - P - A - B ports - T port : standard version version with Y port	bar	320 210 320
Maximum flow with Δp 10 bar P-T	l/min	30 - 60
Step response	see paragraph 6	
Hysteresis (with PWM 100 Hz)	% of Q max	< 6%
Repeatability	% of Q max	< $\pm 1,5\%$
Electrical characteristics	see paragraph 5	
Ambient temperature range	°C	-10 / +50
Fluid temperature range	°C	-20 / +80
Fluid viscosity range	cSt	10 ÷ 400
Fluid contamination degree	According to ISO 4406:1999 class 18/16/13	
Recommended viscosity	cSt	25
Mass: single solenoid valve double solenoid valve	kg	4,4 5,9

HYDRAULIC SYMBOLS (typical)



1 - IDENTIFICATION CODE

D	S	E	5	-				/	10	-		K1
---	---	---	---	---	--	--	--	---	----	---	--	----

Directly operated directional control valve

Electric proportional control

Size ISO 4401-05 (CETOP 05)

Spool type:
C = closed centers
A = open centers

Spool nominal flow (see table 2)

Solenoid position (omit for configuration with two solenoids):
SA = 1 solenoid on side A
SB = 1 solenoid on side B

Coil electrical connection:
plug for connector type
DIN 43650 (**standard**)

D12 = Nominal solenoid voltage 12V DC
D24 = Nominal solenoid voltage 24V DC

Seals:
N = NBR seals for mineral oil (**standard**)
V = FPM seals for special fluids

Series No. (from 10 to 19 sizes and mounting dimensions remain unchanged)

2 - CONFIGURATIONS

Valve configuration depends on the combination of the following elements:
number of proportional solenoids, spool type, nominal flow rate.

2 solenoids configuration:
3 positions with spring centering

"SA" configuration: 1 solenoid on side A.
2 positions (central + external) with spring centering


"SB" configuration: 1 solenoid on side B.
2 positions (central + external) with spring centering

*	Controlled flow with Δp 10 bar P-T
30	30 l/min
60	60 l/min
60/30	60 (P-A) / 30 (B-T) l/min



3 - CHARACTERISTIC CURVES (values measured with viscosity of 36 cSt at 50°C with valves connected to the relative electronic control units)

Typical constant flow rate control curves at Δp according to current supply to solenoid (D24 version, maximum current 1600 mA), measured for the various spool types available.



The reference Δp values are measured between ports P and T on the valve.





SPOOL TYPE C30

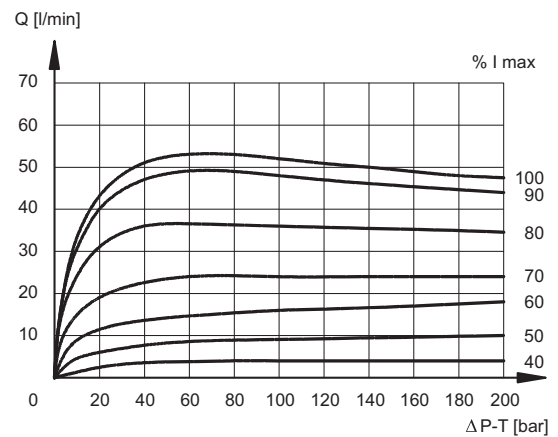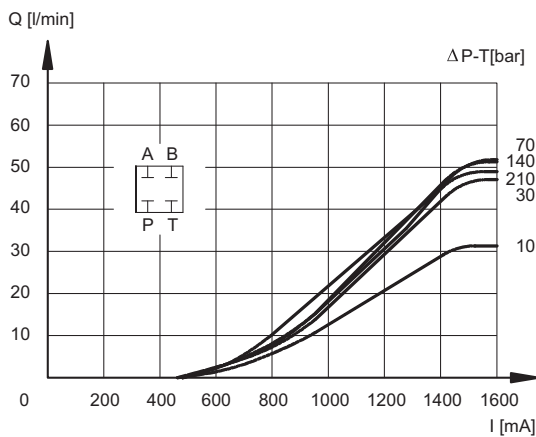

SPOOL TYPE C60

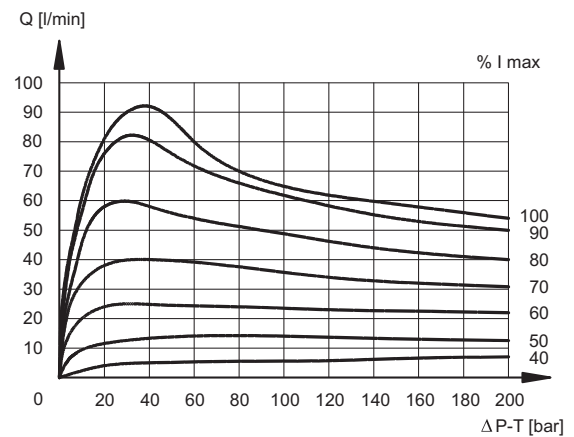
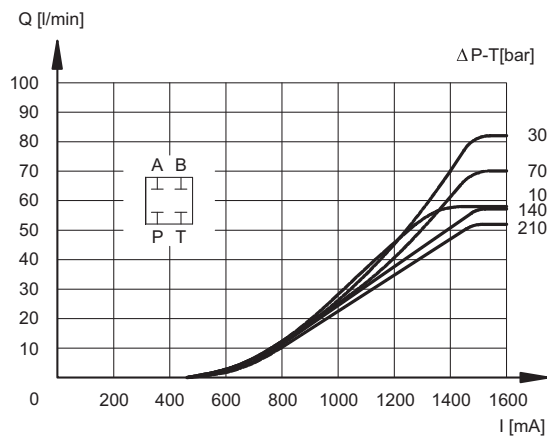


SPOOL TYPE A30

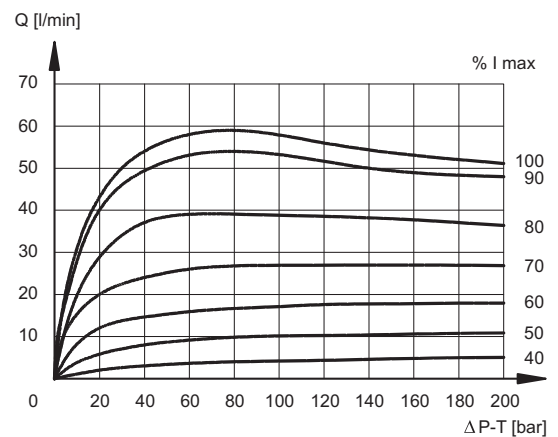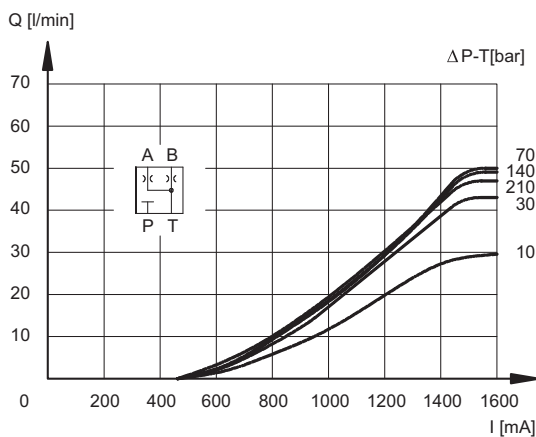



SPOOL TYPE A60

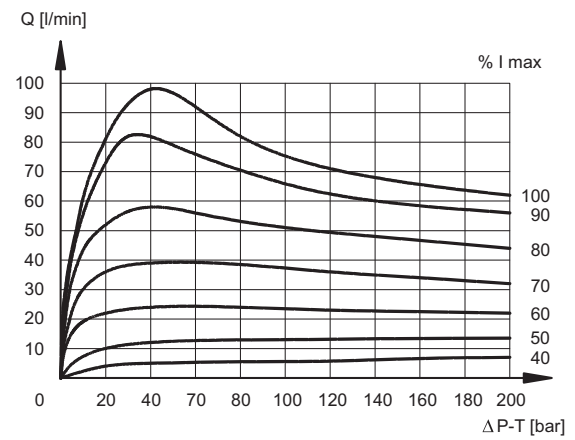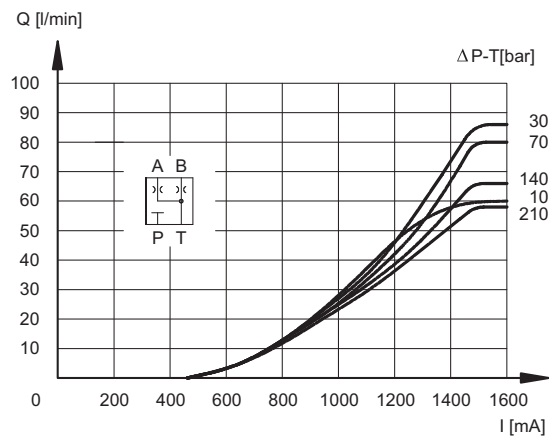

4 - HYDRAULIC FLUIDS

Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals (code N).
 For fluids HFDR type (phosphate esters) use FPM seals (code V).
 For the use of other fluid types such as HFA, HFB, HFC, please consult our technical department.
 Using fluids at temperatures higher than 80 °C causes a faster degradation of the fluid and of the seals characteristics.
 The fluid must be preserved in its physical and chemical characteristics.

5 - ELECTRICAL CHARACTERISTICS

Proportional solenoid

The proportional solenoid comprises two parts: tube and coil.

The tube, screwed to the valve body, contains the armature which is designed to maintain friction to a minimum thereby reducing hysteresis.

The coil is mounted on the tube secured by means of a lock nut.

It can be rotated through 360° depending on installation clearances.

NOMINAL VOLTAGE	VDC	12	24
RESISTANCE (at 20°C)	Ω	3 - 3.4	8.65
MAXIMUM CURRENT	A	2.6	1.6
DUTY CYCLE	100%		
ELECTROMAGNETIC COMPATIBILITY (EMC)	according to 2004/108/CE		
CLASS OF PROTECTION: atmospheric agents (CEI EN 60529) coil insulation (VDE 0580) Impregnation	IP 65 class H class F		

6 - STEP RESPONSE (measured with mineral oil with viscosity of 36 cSt at 50°C with the relative electronic control units)

Step response is the time taken for the valve to reach 90% of the set position value following a step change of reference signal.

The table shows typical response times tested with spool type C60 and $\Delta p = 20$ bar P-T.


REFERENCE SIGNAL STEP	0 → 100%	100 → 0%
Step response [ms] DSE5-A* DSE5-C*	50	70

7 - INSTALLATION

DSE5 valves can be installed in any position without impairing correct operation.


Ensure that there is no air in the hydraulic circuit.

Valves are fixed by means of screws or tie rods on a flat surface with planarity and roughness equal to or better than those indicated in the relative symbols. If minimum values are not observed fluid can easily leak between the valve and support surface.

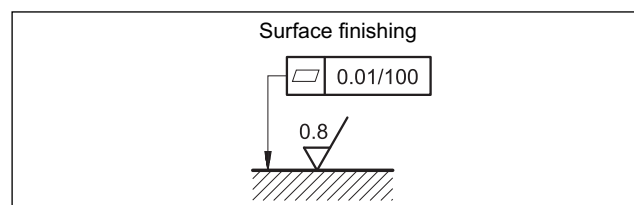


8 - OVERALL AND MOUNTING DIMENSIONS

DSE5-A*
DSE5-C*

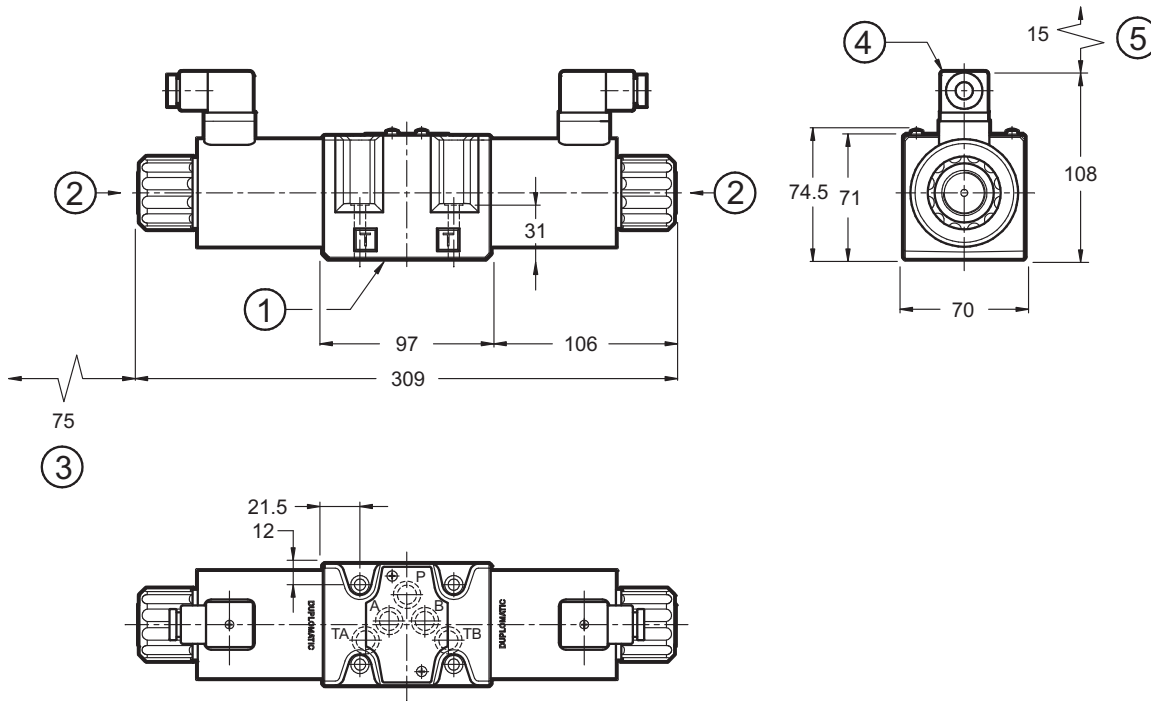

DSE5-A*SA
DSE5-C*SA

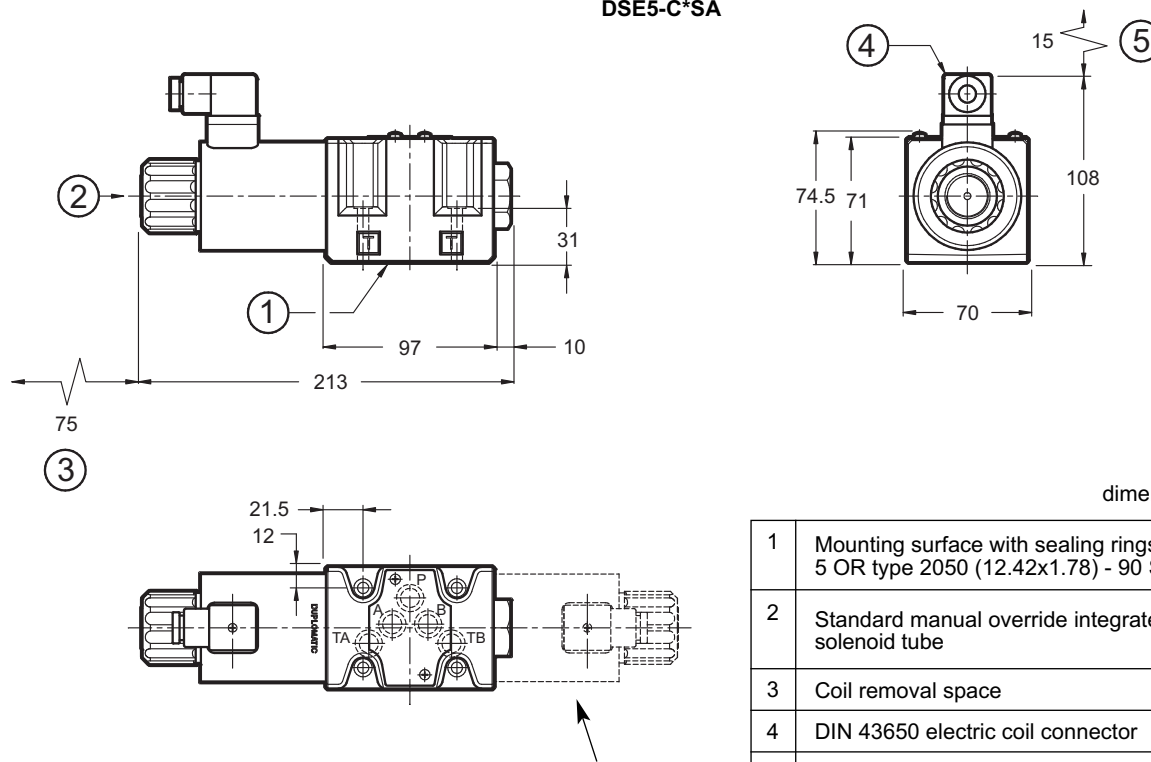

A*SB and C*SB versions solenoid position

dimensions in mm

1	Mounting surface with sealing rings: 5 OR type 2050 (12.42x1.78) - 90 Shore
2	Standard manual override integrated in the solenoid tube
3	Coil removal space
4	DIN 43650 electric coil connector
5	Connector removal space

Fastening bolts: 4 bolts M6x40 (advised class A12.9)
Torque: 8 Nm (bolts A8.8) - 14 Nm (bolts A12.9)


9 - SPECIAL VERSION WITH Y EXTERNAL SUBPLATE DRAIN PORT

Identification Code

D	S	E	5	-				/	10	-		K1	/	Y
Directly operated directional control valve	Electric proportional control	ISO 4401-05 (CETOP 05) size	Spool type: C = closed centers A = open centers	Spool nominal flow (see table 2)	Solenoid position (omit for configuration with two solenoids): SA = 1 solenoid on side A SB = 1 solenoid on side B							Coil electrical connection: plug for connector type DIN 43650 (standard) D12 = Nominal solenoid voltage 12V DC D24 = Nominal solenoid voltage 24V DC	Port for subplate external drain	
												Seals: N = NBR seals for mineral oil (standard) V = FPM seals for special fluids		
												Series No. (from 10 to 19 sizes and mounting dimensions remain unchanged)		

This version allows the operation with pressures up to 320 bar on the valve T port.

It is a drain port Y realized on the valve mounting interface in compliance with ISO 4401-05-05-0-05 (CETOP 4.2-4-R05). The Y port is connected with the solenoid chamber: in this way the tubes are not stressed by the pressure operating on the valve T port.

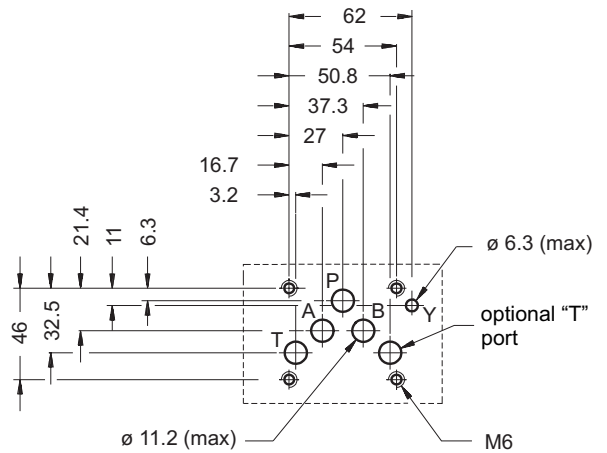



10 - ELECTRONIC CONTROL UNITS

DSE5- **SA (SB)

EDM-M131	for solenoid 24V DC	DIN EN 50022 rail mounting	see cat. 89 250
EDM-M151	for solenoid 12V DC		

DSE5- A* DSE5-C*

EDM-M231	for solenoid 24V DC	DIN EN 50022 rail mounting	see cat. 89 250
EDM-M251	for solenoid 12V DC		

11 - SUBPLATES (see cat. 51 000)

Type PMD4-AI4G with rear ports 1/2" BSP
Type PMD4-AL4G with side ports 1/2" BSP



DIPLOMATIC OLEODINAMICA S.p.A.

20015 PARABIAGO (MI) • Via M. Re Depaolini 24

Tel. +39 0331.895.111

Fax +39 0331.895.339

www.diplomatic.com • e-mail: sales.exp@diplomatic.com